

Product datasheet

LED Puff Light



M-32PL-840-SQ20-WFL-D

Areas of application

- Provides general illumination in residential applications. Ideal for use in foyers, hallways, bedrooms, offices, utility work areas, stairways and many other rooms in the house.

Product benefits


- Efficient luminaire for replacement of compact fluorescent lamp luminaires
- Pleasant homeogenous light
- Extremely long life
- 5 years warranty
- T.H.D:<20%
- Net Weight:720g

Product features



Product Model	Input Voltage	Wattage	Lumens	Efficacy	Power Factor	Rated Life
M-32PL-840-SQ 20-WFL-D	120V	33W	2000 lm	61 lm/W	>0.9	35,000 Hours Rated Life
	Beam Spread	CCT(K)	CRI	Finish	Lamp Base	Dimming Compatibility
	Flood	4000K	≥80	White	N/A	Dimmable

Product datasheet

Dimensional drawings

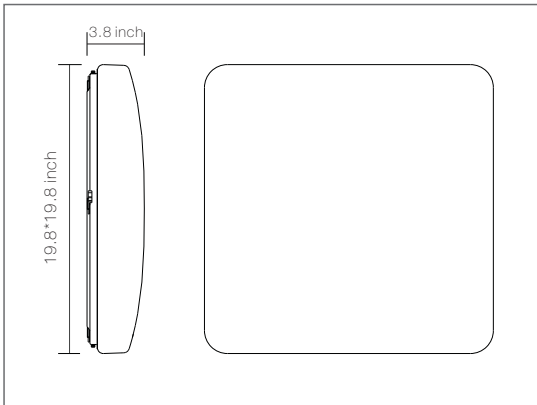

Light Distribution Curve [Unit:cd]

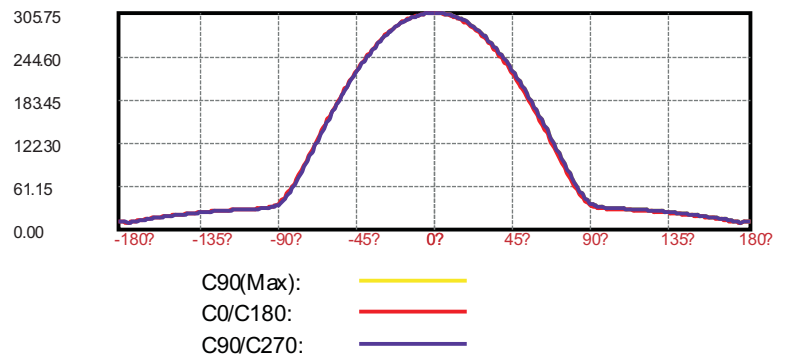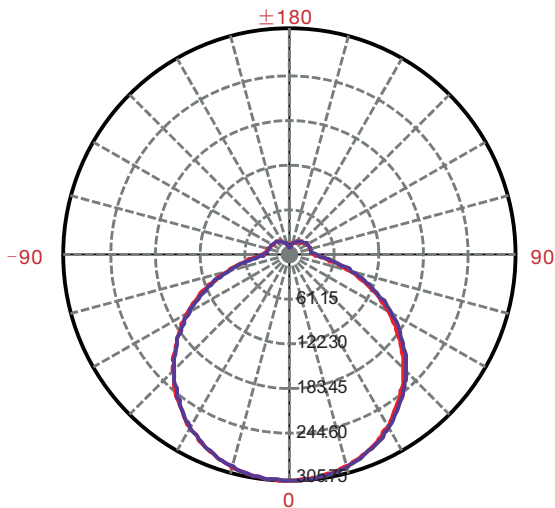

Lux Distance Curve

	Illuminance at a Distance	
	Center Beam LUX	Beam Width V H
2m	76.42 LUX	7.2m 7.2m
4m	19.10 LUX	14.5m 14.3m
6m	8.49 LUX	21.7m 21.5m
8m	4.78 LUX	28.9m 28.6m
10m	3.06 LUX	36.2m 35.8m
12m	2.12 LUX	43.4m 42.9m

Vert. Spread: 122.2 Horiz. Spread: 121.7

